


matki

Linear Towel Rail - LTR
Linear Towel Rail - Handle - LTR-D
Wall Mounted Linear Towel Rail - WLTR

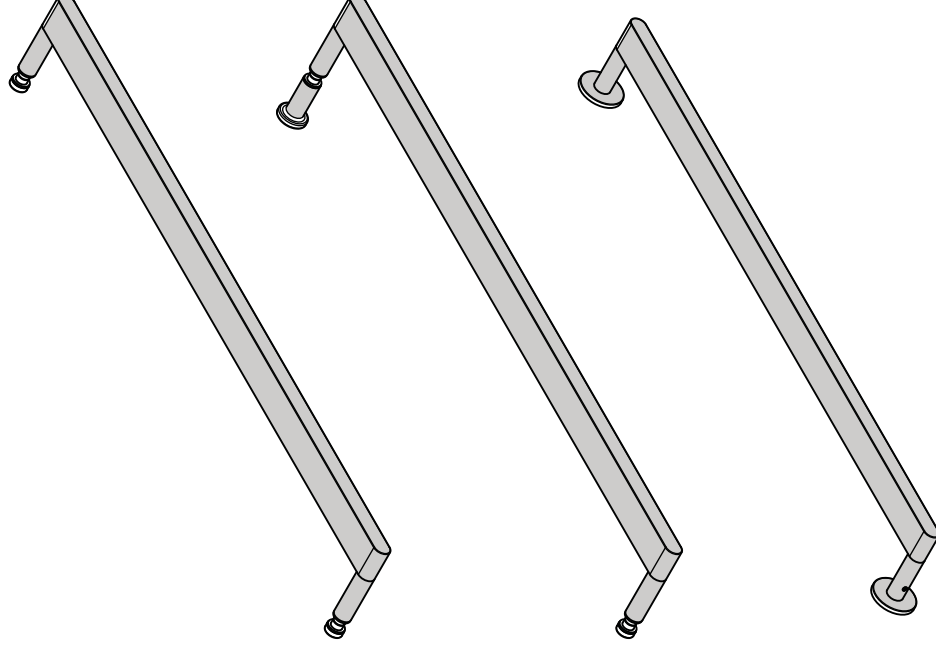


CE	
matki	SHOWERING
13	
Matki PLC, Churchward Road, Yate, Bristol BS37 5PL	
EN 14428:2008+A1	

Cleaning Instructions

Aluminium and Chrome parts should be cleaned with a mild non scratch household cleaner and a soft cloth or sponge.

Do not use acidic-based descaler products or products which are unsuitable for cleaning enamelled surfaces, including abrasive cleaners or cleaners containing bleach or solvents, as the products will effect the anodised framework. Under no circumstances use cleaners with a pH level exceeding 8.

Flash Bathroom Spray or Cif Bathroom Spray can be used on Matki Products. Various specialist cleaning and glass dressing products are available from retailers.

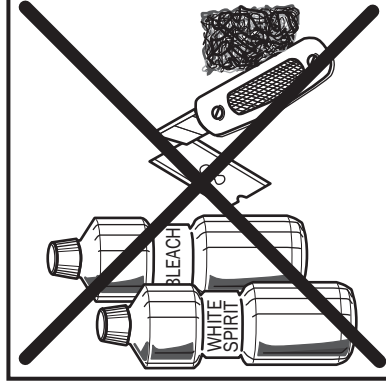


**MATKI PLC, CHURCHWARD ROAD, YATE,
BRISTOL, BS37 5PL**


TELEPHONE: 01454 328816 (AFTER SALES) FAX: 01454 328821

EMAIL: techsupport@matki.co.uk

LINEAR TOWEL RAIL - LTR
 450 MODEL = 9873 CHROME/ BRASS
 600 MODEL = 9871 CHROME/ BRASS

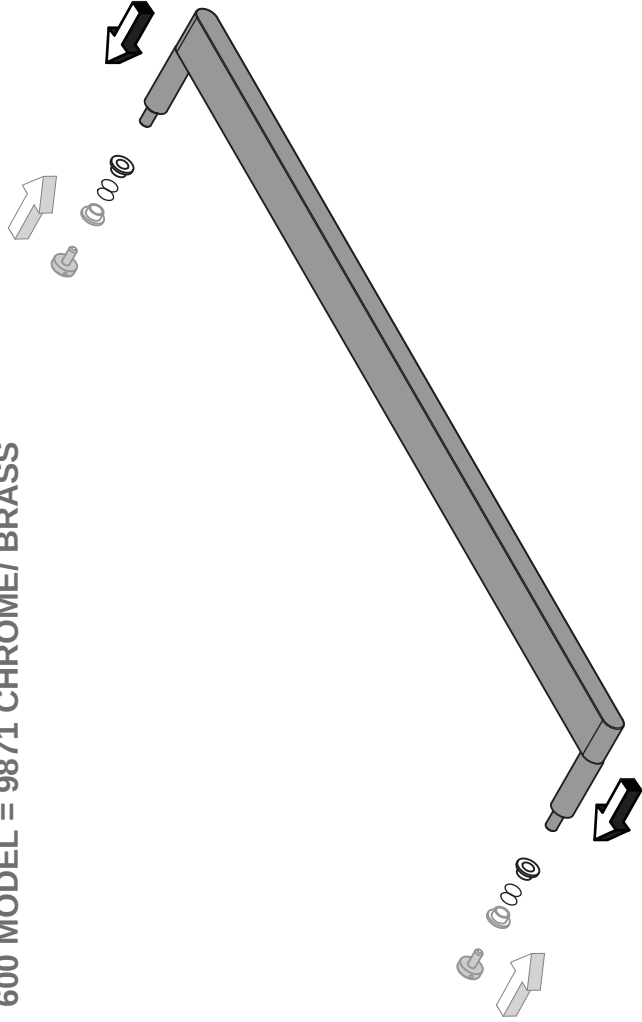


**LINEAR TOWEL RAIL
 HANDLE - LTR-D**
 450 MODEL = 9872 CHROME/ BRASS
 600 MODEL = 9870 CHROME/ BRASS

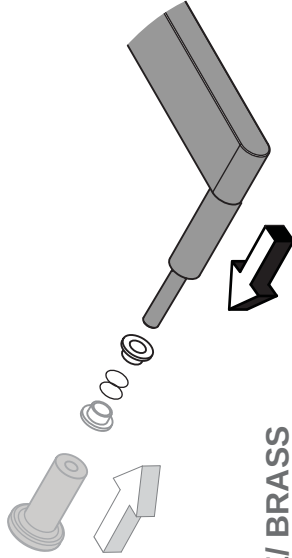

Fitting the LinearTowel rail

- Unscrew the two buttons (button/handle).
- Place the 4 x black glass washers either side of the 2 holes in the glass.
- Place the towel rail with the threads inside up to the outside of the glass screwing through the buttons (button/handle) from the inside to hold the rail in position.

WALL MOUNTED LINEAR TOWEL RAIL - WLTR
 450 MODEL = 9887 CHROME/ BRASS
 600 MODEL = 9888 CHROME/ BRASS

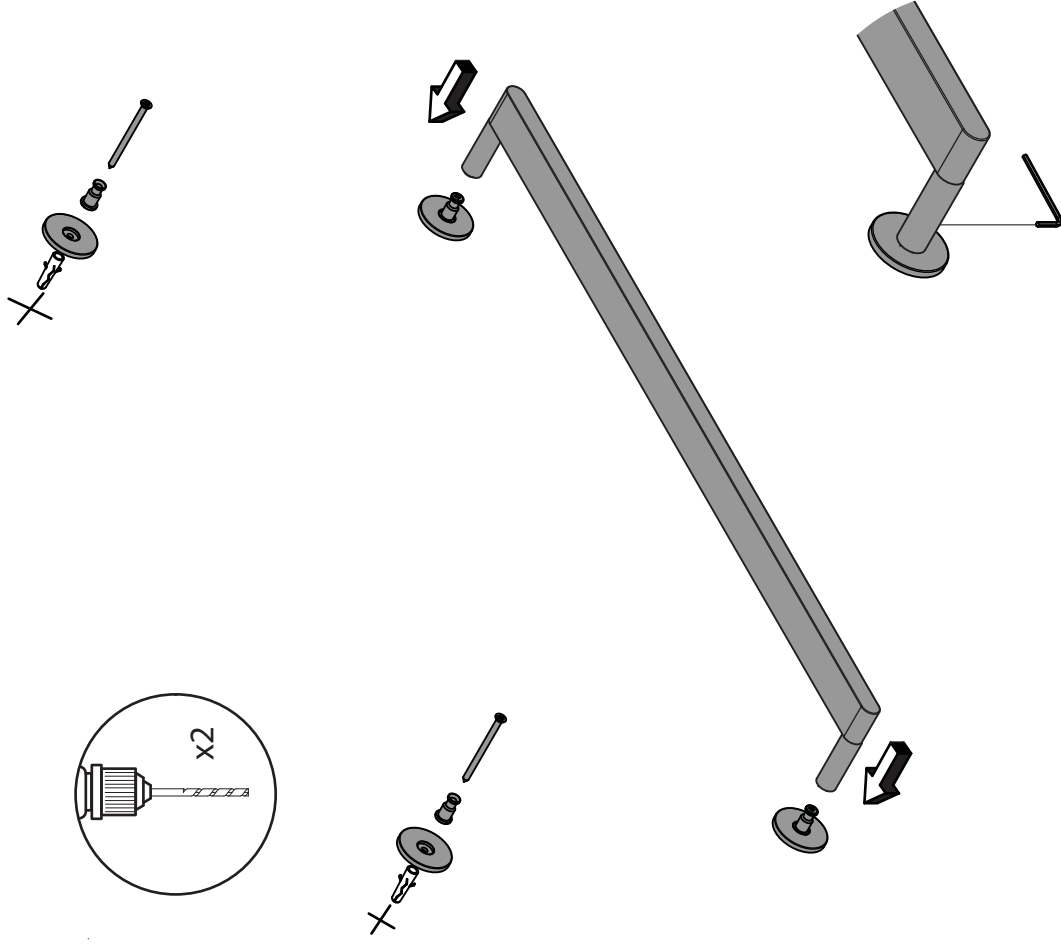

Fitting the Wall Mounted Towel rail

- Mark and drill the holes.
- Push fit the rawl plugs into the holes.
- Screw the Wall Plate and Wall Connector into the rawl plugs.
- Loosen the grub screws in the Towel Rail arms, then push fit the rail onto the Wall Connectors. Tighten the grub screws to secure the Towel Rail into place.